



Experienced



hunt club **cables**




Size: S (M, L, 1X) • **Finished Measurements:**

Chest at Underarm: 37 1/2 (41, 44 1/2, 48)"
Finished Length: 23 3/4 (24 1/2, 25 1/4, 26)"

• **Materials:** Goddess Yarns EMMANUELLA (1 3/4oz/50g, 90yds/82m, 100% merino wool); 9 (10, 11, 12) balls #5621 Philadelphia Red; One each 32" (80 mm) size 7 (4.5 mm) and 8 (4.5 mm) circular needles, One 16" (40 mm) size 7 (4.5 mm) circular needle, One pair straight or set of 4 dpn 7 (4.5 mm) needles, Seven stitch holders, Cable needle (optional),

Tapestry needle, One 24 (24, 26, 26)" separating zipper, Two 5" closed end zippers, Two shock cord stoppers, Cord for bottom (such as leather, suede, heavy elastic shock cord, etc.), 1 1/2 yds 5/8" - or wider ribbon or braid (optional), Sewing needle and matching thread • **Gauge:** In Main Pattern, using larger needles, 16 sts and 20 rows, blocked = 4"/10 cm. To save time, take time to check gauge.

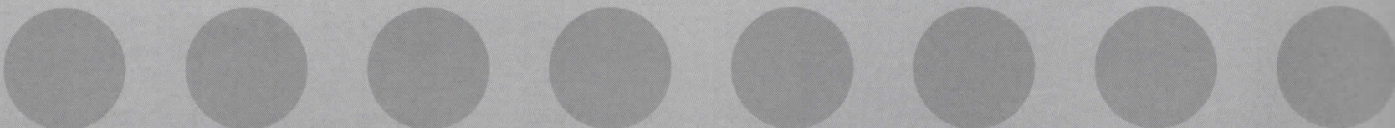



hunt club cables

BY THERESE CHYNOWETH

Special Abbreviations

C3F – Place the sl st on cn and hold in front of work, k2, k1 from cn.

C3B – Place the 2 sts on cn and hold in back of work, k sl st, k2 from cn.

Lower Pocket Linings

Using smaller needles, CO 23 sts. Work in St st for 4 3/4 (4 3/4, 5, 5)". Sl sts to holder and set side. Make second lower pocket lining in same manner.

Upper Pocket Linings

Using smaller needles, CO 21 sts. Work in St st for 3 1/2". BO using sewn BO method (see Technical Notes). Make second upper pocket lining in same manner.

Body

Using smaller 32" needle, CO 150 (164, 178, 192) sts; beg with a RS row. Work 5 rows in Rev St st. Work first and last st of every row as selvedge sts (either sl selvedge st at beg of every row and work st at end of every row, or k at beg and end of every row).

Next row: Work row 1 of Pattern A, increasing 2 sts where indicated – 152 (166, 180, 194) sts. Work next 5 rows of Pattern A, ending with RS row. Change to larger 32" needles. Next row: work first 17 sts as shown, rep Pocket Pattern 3 times and inc 3 sts as shown, work next 86 (100, 114, 128) sts in Main Pat and inc 1 st every 14th (16th, 18th, 21st) st, rep Pocket Pat 3 times and inc 3 sts as shown, then work rem 17 sts - 164 (178, 192, 206) sts. Cont pat as est and, AT THE SAME TIME, work short row on each side of each cable on last row of every second rep (every 12th row), 3 times, ending with a WS row. (See Technical Notes.) Work 1 row and dec 1 st in each pocket cable across row – 6 sts dec - 158 (172, 186, 200) sts rem.

Next row: Work first 15 sts, sl next 23 sts to holder for pocket opening, work sts from one holder with RS facing for lower pocket lining in Main Pattern, work next 82 (96, 110, 124) sts, sl next 23 sts to holder for pocket opening, work sts from rem holder with RS facing for lower pocket lining in Main Pattern, then work rem 15 sts. Work as est and cont to short row on each side of sl-st cables every 12th row, and work until body measures 13 1/2 (13 3/4, 14, 14 1/4)" from beg.

Next row: Work first 37 (41, 43, 48) sts, BO the next 6 sts for armhole, work next 72 (78, 88, 92) sts, BO the next 6 sts for armhole, then work rem 37 (41, 43, 48) sts.

Back

Armhole Shaping: BO 2 sts at beg of next 4 rows, then dec 1 st each side EOR 3 (5, 6, 7) times. AT THE SAME TIME, when armhole measures approx 2 (1 3/4, 1 1/2, 1 1/2)", end Main Pat with a WS row. Next row (RS): K. Work 4 rows of Rev St st. Knit 1 row and inc 1 st above each knit section of Main Pattern. (Note: Do not inc in any partial knit sections at beg and end of row and work one side of cable at right or left side as needed). Cont any rem armhole shaping and beg sl-st cables over all sts - 66 (68, 76, 80) sts.

Work in pat as est until armhole meas approx 9 1/2 (10, 10 1/2, 11)". Next row: Work first 20 (21, 24, 26) sts, work next 26 (26, 28, 28) sts and dec 1 st in each sl-st cable, then place resulting 22 (22, 24, 24) sts on st holder for back neck opening, work to EOR. Work each side of back separately and dec 1 st EOR at neck edge twice - 18 (19, 22, 24) sts rem. AT THE SAME TIME, short row shape shoulders, working to last 4 (4, 5, 6) before shoulder edge once, 4 (5, 5, 6) fewer sts once, then 5 (5, 6, 6) fewer sts twice, ending last row at neck edge. Work 1 row over all sts, working wraps with sts, and sl sts into cables. Sl all sts to holder. Complete other side of Back, rev all shaping.

Right Front

Armhole Shaping: Beg with row appropriate for sl-st cable rep and BO 2 sts at beg of every WS row twice, then 1 st 3 (5, 6, 7) times. AT THE SAME TIME, when armhole measures approx 2 (1 3/4, 1 1/2, 1 1/2)" end Main Pat with a WS R (sl-st cables of front edge should be at last row of rep).

Upper Pocket Opening: Using straight or dpn, CO 19 sts, Purl1 row, then set aside. Next row: Work first 10 sts of right Front, BO next 19 sts k-wise for pocket opening, then k to end of row. Next row: Knit to pocket opening, k sts from straight or dpn, then work to end of row. Work 1 more row as est. Beg sl-st cable over all sts and inc 1 st above each knit section from Main Pattern and cont any rem armhole shaping - 33 (35, 36, 41) sts. Cont straight until armhole measures approx 8 (8 1/2, 9, 9 1/2)", ending with a WS row.

Neck Opening: Work first 9 sts and sl to st holder, then work to EOR - 24 (26, 27, 32) sts rem. Cont pat and sl sts to holder at beg of every RS row, 3 sts once, 2 sts once, then 1 st 1 (2, 0, 3) times - 18 (19, 22, 24) sts rem. Work straight until armhole measures approx 9 1/2 (10, 10 1/2, 11)", ending with a WS row. Shape shoulder same as Back, leaving sts on needle.

Shoulder BO: Sl sts for right Back to spare needle, then BO using 3 needle method.

Left Front: Work as for right Front, rev all shaping.

Neckband

Using 16" circular needle with RS facing, attach yarn and work sts from right Front holder, work cable at front edge as est, dec 2 sts over second sl-st cable, pick up sts along side of neck, work sts from Back neck holder and dec 1 st over each sl-st cable, pick up sts along side of neck, then work sts from left Front holder and dec 2 sts over second to last sl-st cable (total number of sts between sl-st cables at front opening edges should be divisible by 6 + 2).

Work back and forth, cont sl-st cables at front edges and beg k4, p2 rib over rem sts and work until neckband measures approx 2 1/4", ending with last row of cable rep and a RS row.

Next row (WS): K1, k2tog, k 6, *k2tog, k 4; rep from * to last 9 sts, k2tog, k7. BO purlwise.

Armhole Edging

Using 16" circular needle and with RS facing, beg at underarm and pick up approx 9 sts per 2" along armhole edge. Join. Purl 3 rnds. BO purlwise. Work edging along rem armhole in same manner.

Front Edgings

Using smaller 32" circular needle with RS facing, pick up sts in same manner as armhole edging along left Front opening edge from top of neckband to middle of Rev St st band at lower edge. Knit 1 row on WS, then BO purlwise. Work edging along right Front opening edge in same manner.

Lower Pocket Trims

Sl sts from one pocket to straight or dpn. Reattach yarn and beg with a RS row. Work 4 rows of Rev St st, then BO in Rev St st. Neatly sew ends of pocket trim to front. Make pocket trim on rem pocket edge in same manner.

Finishing

Block vest to finished measurements. Sew side and bottom edges of lower pocket linings to WS.

Pin separating zipper into front opening with opening edges meeting at center of zipper, placing bottom of zipper at middle of bottom edging and turn under top edge of zipper tape. Sew in zipper. Turn up half of bottom edging to inside, then sew to WS, making sure zipper clears edges of hem when opened and closed.


Thread cord through casing at lower edge, and ends of cord through stoppers. Knot ends of cord.

Pin short zippers to top of upper pocket linings, placing top stops of zippers on opposite sides of linings, and having top edges even. Baste tog along top edges. Pin zipper and lining to inside of each upper pocket opening, having top stops of each zipper facing toward center of front, and BO edge of lower part of pocket opening to lower section of zipper tape. Sew zipper to lower opening edge, making sure to keep pocket lining free. Neatly sew ends of trim to RS. Sew top of opening to zipper, through all layers, above Rev St st. Neatly sew side and lower edges of pocket linings to WS.

If desired, to create a neater finish on inside of vest, neatly sew braid or ribbon to inside over edge of zipper tape, placing one edge of braid or ribbon over edge of zipper tape, turning under upper and lower ends, then sew to WS. Option: With scraps of matching yarn, pick up approx 9 sts per 2" along first k st from front st-st cable. Work 3 rows of St st, then BO. Turn facing toward center front and neatly sew over edge of zipper tape.

Charts/Schematics cont'd. on page 74.

cont'd. from page 73

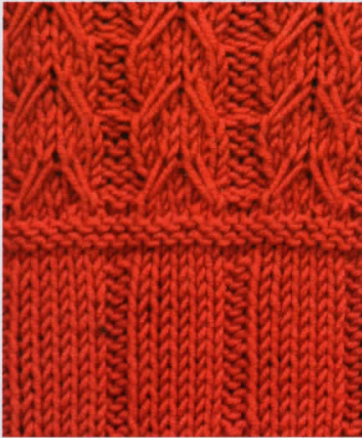


Technical Notes

When working cables, use cable needle if desired. Optional method: Drop sl st off left needle, k next 2 sts, pick up and k sl st, k next st through front of loop only and leave on left needle, k 2 sts to right of sl st, then drop all 3 sts from left needle.

The sewn BO for the upper pocket linings resembles a CO edge and can be worked in this manner: When pocket lining is complete, cut yarn approx 3 times longer than pocket width and thread end through tapestry needle. With RS facing, bring tapestry needle through from WS to RS of first st and under needle. Insert tapestry needle from RS to WS of st to left of st just worked, under needle, and back through first st, from WS to RS. * Insert tapestry needle from RS to WS of st 2 sts to left of last st worked, then back through st to right this st. Rep from * to EOR, making sure to evenly space sts so work does not pull in. Pull yarn through last st to fasten off.

On the 12th row of each cable, work short rows to compensate for the difference in the row gauge between the cables and the surrounding sts.

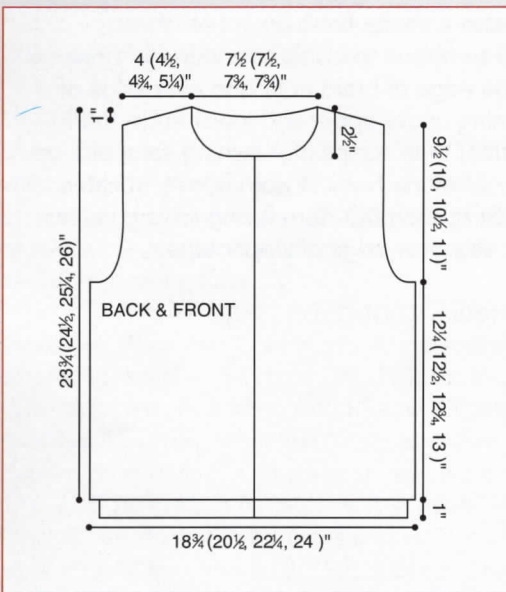

- Key
- = K on RS rows, P on WS rows
 - = P on RS rows, K on WS rows
 - = Yo
 - = Slip st purlwise with yarn to WS
 - + = Selvedge st
 - = P2tog
 - = P2tog tbl
 - = C3F
 - = C3B
 - M = Make 1 (inc 1 st)

PATTERN A

